


TP35D2-A7 Motherboard

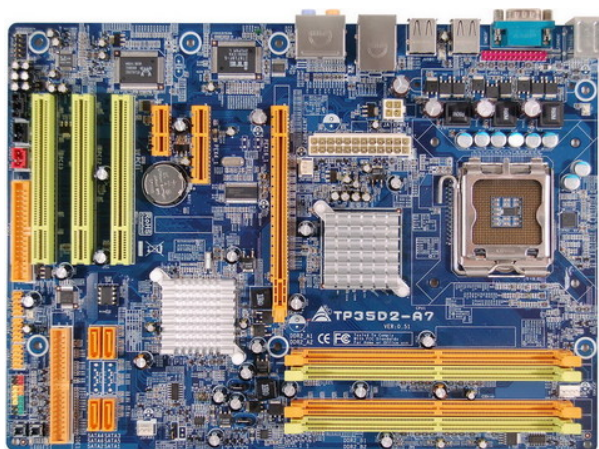

- Socket LGA 775
- Supports Intel Core 2 Quad/Core 2 Duo/Pentium D/Pentium 4/Celeron 400 Series/Celeron D Processor
- Supports FSB 800/1066/1333MHz
- Support Intel Hyper-Threading Technology
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

TP35D2-A7 Specification

CPU SUPPORT	Intel® Core™ 2 Extreme Processor Intel® Core™ 2 Quad Processor Intel® Core™ 2 Duo Processor Intel® Pentium® Dual-Core Processor Intel® Pentium® D Processor Intel® Pentium® 4 Processor Intel® Celeron® D Processor Intel® Celeron® Processor 400 Sequence Support Intel® 45nm CPU
FSB	Support FSB 800/1066/1333MHz
MEMORY	Support Dual Channel DDR2 533/667/800/1066 MHz 4 x DDR2 DIMM Memory Slot Max. Supports up to 8GB Memory ※Support DDR2 1066MHz While Using FSB 1333 CPU ※Support DDR2 533MHz While Using FSB 533/1066 CPU
STORAGE	4 x SATA II Connector 1 x IDE Connector By JMB368
LAN	Realtek RTL8110SC - 10/100/1000 Controller
AUDIO CODEC	Realtek ALC888 8+2 Channel HD Audio

USB	6 x USB 2.0 Port 3 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E x16 Slot 1 x PCI-E x4 Slot 1 x PCI-E x1 Slot 3 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 6 x USB 2.0 Port 1 x COM Port 1 x LAN Port 6 x Audio Jacks
INTERNAL I/O	3 x USB 2.0 Header 4 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x CD-IN Header 1 x S/PDIF-IN Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 1 x North Bridge FAN Header 1 x System Fan Connector 1 x Printer Port Header
DIMENSION	ATX Form Factor Dimension: 22cm X 30.5cm (W x L)
OS SUPPORT	Supports Windows 2000 / XP / Vista
ACCESSORIES	1 x IDE Cable 1 x FDD Cable 2 x SATA Cable 1 x SATA Power Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x User Manual
FEATURES	Supports Solid capacitor Tweak Tech Supports Fanless Supports Clean-Tone Supports O.N.E Supports C.R.P Supports S.R.S Supports M.I.T Supports T-Power Supports Rapid Switch Supports Rapid Debug

TP35D2-A7 OVERVIEW

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!

BIOSTAR