


## P4M900-M7 SE Motherboard

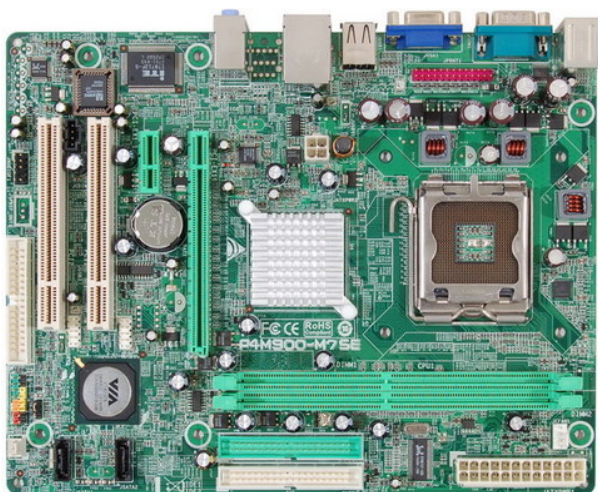

- Socket LGA 775
- Supports Intel Core 2 Duo/Pentium D/Pentium 4/Celeron D/Celeron 400 Series Processor
- Supports FSB 533/800/1066MHz
- Support Intel Hyper-Threading Technology
- Due to the chipset limitation, the actual memory size may be less than 4GB for the reservation for system usage under Windows® XP, Windows® XP 64-bit, Windows® Vista™ and Windows® Vista™ 64-bit.

## P4M900-M7 SE Specification

|                  |                                                                                                                                                                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU SUPPORT      | Intel® Core™ 2 Duo Processor<br>Intel® Pentium® Dual-Core Processor<br>Intel® Pentium® D Processor<br>Intel® Pentium® 4 Processor<br>Intel® Celeron® D Processor<br>Intel® Celeron® Processor 400<br>Sequence<br>Maximum CPU TDP (Thermal Design Power) : 95Watt |
| FSB              | Support FSB 533/800/1066MHz                                                                                                                                                                                                                                      |
| MEMORY           | Support DDR2 533/667 MHz<br>2 x DDR2 DIMM Memory Slot<br>Max. Supports up to 4GB Memory                                                                                                                                                                          |
| INTEGRATED VIDEO | VIA Chrome9 HC IGP, On Board Graphic<br>Max. Memory Share Up to 256MB                                                                                                                                                                                            |
| STORAGE          | 2 x SATA Connectors<br>2 x IDE Connector<br>Support SATA RAID: 0,1                                                                                                                                                                                               |
| LAN              | Realtek RTL8201CL - 10/100 PHY                                                                                                                                                                                                                                   |
| AUDIO CODEC      | Realtek ALC662 6-Channel HD Audio                                                                                                                                                                                                                                |

|                |                                                                                                                                                                                                                                               |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB            | 4 x USB 2.0 Port<br>2 x USB 2.0 Header                                                                                                                                                                                                        |
| EXPANSION SLOT | 1 x PCI-E x16 Slot<br>1 x PCI-E x1 Slot<br>2 x PCI Slot                                                                                                                                                                                       |
| REAR I/O       | 1 x PS/2 Mouse<br>1 x PS/2 Keyboard<br>4 x USB 2.0 Port<br>1 x COM Port<br>1 x VGA Port<br>1 x LAN Port<br>3 x Audio Jacks                                                                                                                    |
| INTERNAL I/O   | 2 x USB 2.0 Header<br>2 x SATA Connector<br>2 x IDE Connector<br>1 x Floppy Connector<br>1 x Front Audio Header<br>1 x Front Panel Header<br>1 x CD-IN Header<br>1 x CPU Fan Connector<br>1 x System Fan Connector<br>1 x Printer Port Header |
| DIMENSION      | Micro ATX Form Factor Dimension: 19 cm X 24.4 cm ( W x L )                                                                                                                                                                                    |
| OS SUPPORT     | Supports Windows 2000 / XP / Vista                                                                                                                                                                                                            |
| ACCESSORIES    | 1 x IDE Cable<br>1 x FDD Cable (Optional)<br>1 x SATA Cable (Optional)<br>1 x I/O Shield<br>1 x Fully Setup Driver CD<br>1 x User Manual or Quick Guide                                                                                       |

## P4M900-M7 SE OVERVIEW

**\*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**