


## P41D3 Motherboard

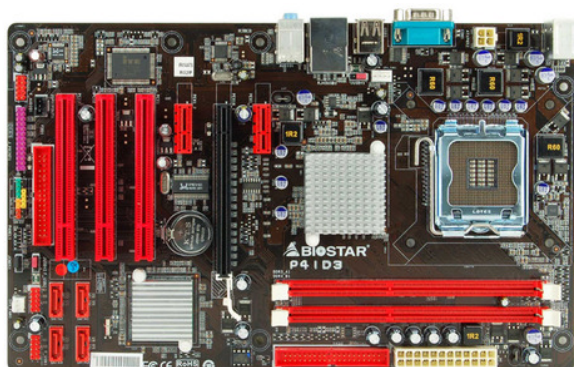

- Socket LGA 775
- Supports Intel Core 2 Quad/ Core 2 Duo/ Pentium Dual-Core/ Celeron Dual-Core/ Celeron 400 Series Processor
- Supports FSB 800/1066/1333/1600(OC)MHz
- Support Intel Hyper-Threading Technology
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

## P41D3 Specifcation

|             |                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU SUPPORT | Intel® Core™ 2 Quad Processor<br>Intel® Core™ 2 Duo Processor<br>Intel® Pentium® Dual-Core Processor<br>Intel® Celeron® Dual-Core Processor<br>Intel® Celeron® Processor 400 Sequence<br>Maximum CPU TDP (Thermal Design Power)<br>: 125Watt |
| FSB         | Support FSB 800/1066/1333MHz                                                                                                                                                                                                                 |
| MEMORY      | Support Dual Channel DDR3<br>800/1066/1333(OC) MHz<br>2 x DDR3 DIMM Memory Slot<br>Max. Supports up to 4GB Memory<br>FSB800 MHz CPU only support DDR3-800                                                                                    |
| STORAGE     | 4 x SATA II Connector<br>1 x IDE Connector                                                                                                                                                                                                   |
| LAN         | Realtek RTL8111DL - 10/100/1000 Controller                                                                                                                                                                                                   |
| AUDIO CODEC | Realtek ALC662 6-Channel HD Audio                                                                                                                                                                                                            |
| USB         | 4 x USB 2.0 Port<br>2 x USB 2.0 Header                                                                                                                                                                                                       |

|                |                                                                                                                                                                                                                                                                |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EXPANSION SLOT | 1 x PCI-E x16 Slot<br>2 x PCI-E x1 Slot<br>3 x PCI Slot                                                                                                                                                                                                        |
| REAR I/O       | 1 x PS/2 Mouse<br>1 x PS/2 Keyboard<br>4 x USB 2.0 Port<br>1 x COM Port<br>1 x LAN Port<br>3 x Audio Jacks                                                                                                                                                     |
| INTERNAL I/O   | 2 x USB 2.0 Header<br>4 x SATA II Connector (3Gb/s )<br>1 x IDE Connector<br>1 x Floppy Connector<br>1 x Front Audio Header<br>1 x Front Panel Header<br>1 x S/PDIF-Out Header<br>1 x CPU Fan Connector<br>1 x System Fan Connector<br>1 x Printer Port Header |
| DIMENSION      | ATX Form Factor Dimension: 29.5 cm X<br>18.2 cm ( W x L )                                                                                                                                                                                                      |
| OS SUPPORT     | Supports Windows XP / Vista / 7                                                                                                                                                                                                                                |
| ACCESSORIES    | 2 x SATA Cable<br>1 x I/O Shield<br>1 x Fully Setup Driver CD<br>1 x User Manual                                                                                                                                                                               |
| FEATURES       | Windows 7 Compatible<br>Supports Solid capacitor<br>BIO-FLASHER                                                                                                                                                                                                |

## P41D3 OVERVIEW

**\*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**